



®

Brand of IF Design Award/Red Dot Design Award
同时荣获德国IF/红点设计大奖的咖啡器具品牌



白

White



银

Silver



棕

Grey



黑

Black

S01 Propeller Hand Grinder

Visual bean box

CNC stainless steel burr, grinding fast and easier

Integrated dual-bearing design, more evenly grinding

Vertical 3D line body, anti-slip and comfortable gripping

Suitable for pour over and other appliances

Enjoy fresh coffee anytime, anywhere

螺旋桨S01手摇磨豆机

可视螺旋桨豆仓

CNC精钢磨芯磨盘

一体式双轴设计

研磨快速且均匀

螺旋桨S01手摇磨豆机

研磨顺畅更省力

机身竖状立体纹路

研磨防滑且握感舒适

适用于手冲和其他器具

随时随地享受现磨咖啡



Operation Steps :

操作步骤 :



- 1. Remove the handle, pour in the beans
- 1. 取下豆仓上盖倒入咖啡豆



- 2. Hold the body and rotate the handle to grind
- 2. 握住机身，顺时针转动进行研磨




- 3. Unscrew the powder box
- 3. 拧下粉仓




- 4. Pour out the ground coffee
- 4. 将研磨好的咖啡粉倒出即可

Grinding thickness adjustment (default is medium particle)

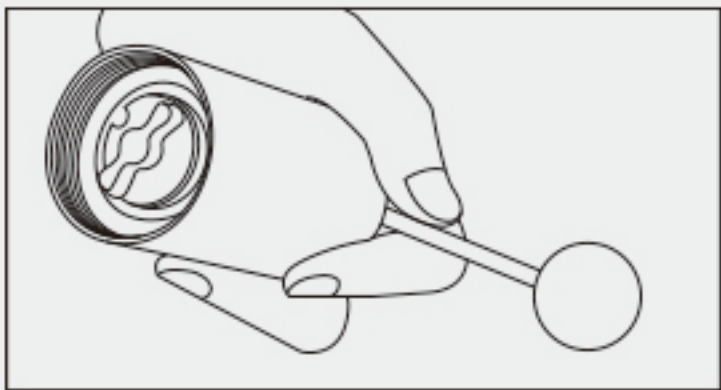


Fix the handle

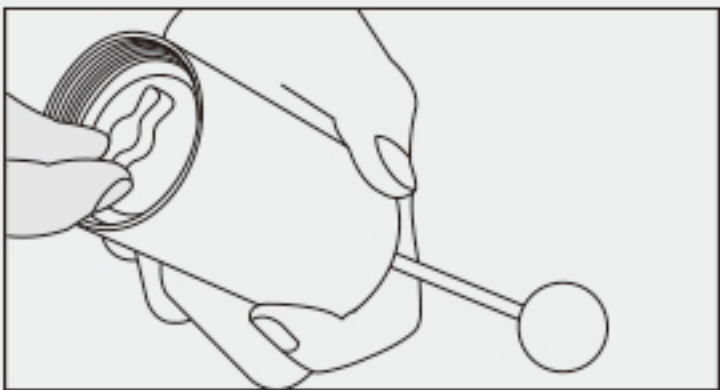


Rotate the adjusting plate counterclockwise to grind coarse powder; clockwise to fine powder

*Note: From the tight state
Fine: 15 counterclockwise
Medium: 32 counterclockwise
Coarse: 40 counterclockwise

⚙ 研磨粗细度调节 (默认为中度颗粒)

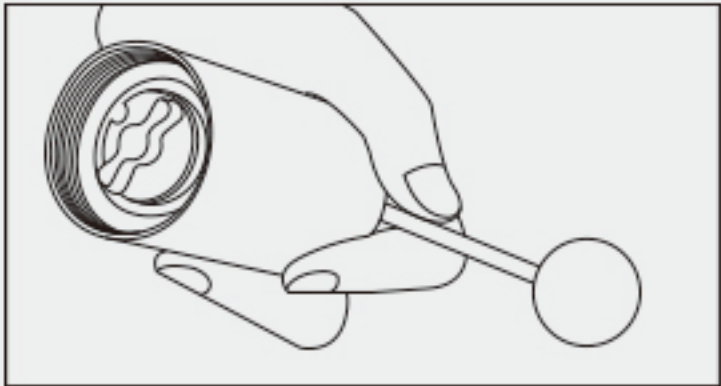

用手固定把手并握紧机身

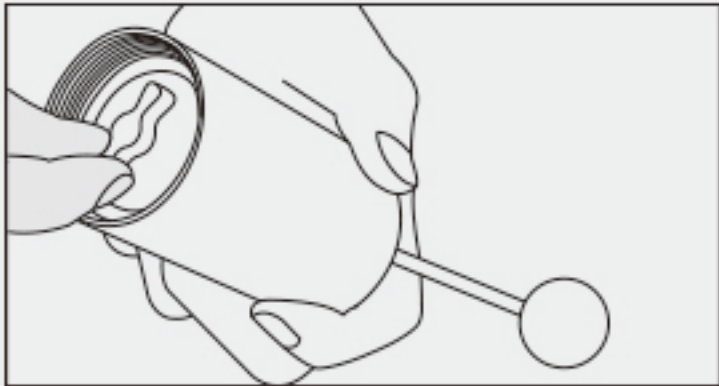

逆时针旋转调节盘，研磨粗粉
顺时针旋转调节盘，研磨细粉

*注释建议: 先顺时针拧紧归位点

细粉: 逆时针15格

中粉: 逆时针32格

粗粉: 逆时针40格

○

Parameter

Model: MDJ-6W/MDJ-6S/MDJ-6BR/MDJ-6B Color: White/Silver/Brown/Black
Capacity: 15g Material: Stainless steel/Alluminium Alloy/Glass/PC/ABS
Executive Standard Number: 4806.9-2016

参数

型号: MDJ-6W/MDJ-6S/MDJ-6BR/MDJ-6B 颜色: 白色/星光银/亮栗棕/曜石黑
容量: 15克 材质: 不锈钢/铝合金/玻璃/PC/ABS 执行标准号: 4806.9-2016

○

*Cleaning and maintenance:

- ① When using for the first time, grind a little beans and discard them to clean the core
- ② The fuselage inside cannot be washed directly, the core needs to be disassembled to wash or cleaned with a brush
- ③ The bean box only for roasted coffee beans, not for other materials
- ④ The fuselage outside is washable, dry it with soft cloth after cleaning
- ⑤ *Do not wipe with corrosive cleaning detergent

*清洁保养注意事项:

- ① 初次使用时，研磨少许咖啡豆倒掉不用，以清洁磨芯。
- ② 机身内部不可直接水洗，清洁磨芯需要拆卸水洗或使用毛刷清洁。
- ③ 豆仓只可加入已烘焙的咖啡豆，不可加其他物料。
- ④ 机身外部可水洗清洁，清洁后需要柔软的口布擦拭干净。
- ⑤ *不可使用腐蚀性清洁剂进行擦拭



Beijing Guixia Legend Trading Co., Ltd.

Address: Building 4, Room 510, Longqi Square, Yard 19, Huangping road

Changping District, Beijing, China

Service hotline: 010-82962392

Website: www.zerohero.cc

北京瑰夏传奇贸易有限公司

地址：北京市昌平区回龙观镇黄平路19号院4号楼5层510室

服务热线：010-82962392

网址：www.herocafe.cc



HERO S01 PROPELLER HAND GRINDER MANUAL

Hero螺旋桨S01手摇磨豆机说明书